


## 4 Channel Online Partial Discharge Monitoring System (19" Rack Mount Enclosure)

TMS-5141R

### Key Features \_\_\_\_\_

- High Resolution PRPD Pattern
- Noise Elimination through Gating Channel and variable Frequency Range
- Ethernet Interface for permanent Data Storage
- Local True Color Touch LCD

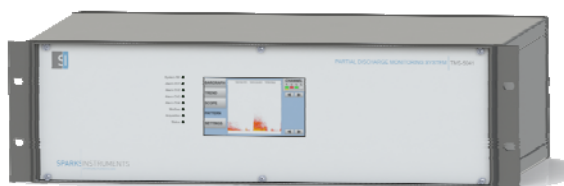

### Applications \_\_\_\_\_

- Turbo Generators
- Hydro Generators
- Large Industrial Motors
- Windmills

### General Description \_\_\_\_\_

The **TMS-5141** is a four channel partial discharge trending system with a true color LCD display showing all the necessary information for the commissioning and surveillance of high voltage rotating machines or switch gears. The noise gating channel and variable LP Filter allows to separate noise from the pd signals. The **TMS-5141** shows actual partial discharge level for every individual channel (phase) on a bargraph, Realtime Partial Discharge Activities in Oscilloscope View as well as a coloured phase resolved partial discharge pattern. The touch functionality of the LCD display allows to parametrise, store and visualise the partial discharge signals without the use of any computer. Optionally a computer can be connected through the built in Ethernet Interface to store permanently measured results. Eight optional 4-20mA input channels allows to record machine operation conditions as MW, MVA, temperatures etc. together with the partial discharge signals. The optional Modbus RTU interface allows an easy integration into the existing SCADA/DCS system. Individual 4-20mA and relay outputs per channel are available. This make the **TMS-5141** the ideal cost effective partial discharge monitoring system for permanent installation with permanent data recording.

### Ordering Information \_\_\_\_\_

Order Code: 17.5141.AAA.BBB.CCC.DDD

AAA: Enclosure type:

- 065: IP65 Protected Wallmount Enclosure
- 019: 19" Rackmount Enclosure (3HU)
- 035: DIN Rail mount (35mm)

BBB: Power Supply:

- 264: 85-264VAC, 50/60Hz or 90-375VDC
- 024: 18-36VDC

CCC: Communication Interface

- 485: Modbus RTU Interface (optional)

DDD: Additional Inputs

- 420: 8x4-20mA Input for Operation Parameters (optional)

# 4 Channel Online Partial Discharge Monitoring System (19" Rack Mount)



## Technical Data

TMS-5141R

### Data Acquisition of Partial Discharge Channels

PD Input Channels (Multiplexed + Gating):	4+1	Acquisition Time Intervall:	1 to 600 sec/ch
Frequency Range *1			
Selectable LP Filter:	40KHz to 5MHz	Sensor Compatibility:	
Selectable HP Filter:	800kHz to 300MHz	Coupling Capacitors:	80pF - 10nF <sup>2)</sup>
Signal Gain (HW):	40dB	RF CT's:	yes <sup>2)</sup>

- 1) Frequency Range of complete measurement chain depends on selected PD sensor  
2) Sensitivity of measurement circuit depends on selected sensor type

### Voltage References

Reference from Coupler	10mV to 30VACrms	External Voltage Reference:	max 260VAC
Frequency Range:	0.1 to 200Hz	From Power Supply:	max 260VAC <sup>2)</sup>

2) only available on AC Power Supply Version

### Interfaces

Relais Contacts NO/NC	System OK+CH 1-4)	Modbus RTU::	RS-485
Analogue Output:	4x 4-20mA (1 per Ch)	Ethernet:	100Mbit/s
Analogue Input (OP Parameters):	8x4-20mA		

### Display

Dimension:	4.3"	Color Depth:	24bit
Resolution:	480x272pxl	Touch:	Resistive

### Local Results

Phase Resolved Partial Discharge Pattern:		Trend:	max. 1 Year
Resolution & Color:	256x256 -16bit color	Event Logging:	yes
Bargraph:	4 (1 per Channel)		

### Mechanical Dimensions

Dimensions (H x W x D)	3HU x 19" x 235mm	Protection Class:	IP54
Weight:	4kg		

Sparks Instruments reserves the right, without further notice, to change the product specifications and/or the information on this document to improve reliability, functions and design of this product. © 2011, Sparks Instruments, All rights reserved.

### Contact

**Sparks Instruments SA**  
Bodematta 12, 1714 Heitenried  
Switzerland

Email: [sales@sparksinstruments.com](mailto:sales@sparksinstruments.com)  
Web: [www.sparksinstruments.com](http://www.sparksinstruments.com)

Worldwide Exclusive Sales Representative  
& Tech Support



Route des Daillettes 6  
1709 Fribourg, Switzerland  
Phone: +41 26 401 84 56  
Email: [sales@mc-monitoring.com](mailto:sales@mc-monitoring.com)